

Shaping the world of construction with modern day solutions



WIDE
RANGE



CONSISTANT
QUALITY



TECHNICALLY
SUPERIOR
PRODUCTS



WATERPROOFING | TILE & STONE FIXING | SURFACE PREPARATION | REPAIR | ANCILLARY



OUR BRAND STORY

The journey of Nuvoco is a story we feel is just the beginning. With its roots in India's most epic start-up in the 1970s – Nirma Group of Industries – Nuvoco has created its journey, reached its milestones, and built its way from humble beginnings in Nimbol to 11 Cement Manufacturing Facilities and more than 50 Ready-Mix Concrete Plants across the nation.

In 2014, Hiren Patel, the son of Karsanbhai Patel, envisioned a company that would build the India of tomorrow. As a result, Nirma Group entered the cement business by building a greenfield cement plant in Nimbol, Rajasthan. The Nirma Group acquired Lafarge India Limited in 2016, thus marking its presence in India and showing a clear commitment to infrastructure in the country. In our journey toward growth, this was an important step.

With this remarkable acquisition came a new identity that could match up this scale. This challenge was then taken on with great vigor and enthusiasm by the leadership. Thus, Nuvoco was born. On 3rd April 2017, we named our Company '**Nuvoco Vistas Corporation Limited**' which means a New Age Construction Company. 'Nuvo' newness, 'Co' Construction and 'Vistas' – Avenues that predict and set trends for its industry.

VISION, MISSION & VALUES

We redefined our organization with a mission to be a **'Trusted Building Materials Company Creating Value for Our Stakeholders'** and a vision of **'Building a Safer, Smarter and Sustainable World'**.

Safer

Superior quality products that are safer for our customers and everyone associated with us.

Smarter

Innovative, contemporary, and value-for-money solutions for our discerning customers.

Sustainable

Building and contributing to a sustainable world by creating products that cause less damage to the environment.

At Nuvoco, our values serve as the compass guiding every decision, interaction, and endeavor we undertake.

Our values are not just words on a page; they reflect who we are, what we stand for, and how we conduct ourselves in every aspect of our business. The five values which are the guiding principles are:



Integrity



Entrepreneurship



Collaboration



Care



**Operational
Excellence**

THE MAKING OF INDIA'S 5TH LARGEST CEMENT GROUP

Nuvoco Vistas Corporation Limited continued to grow organically and inorganically since its inception. We acquired NU Vista Limited (formerly Emami Cement Limited) and became the fifth largest cement company in India and the largest cement company in the East in terms of capacity offering a diverse product portfolio Through the years, we strengthened our businesses – grown Cement capacities, reshaped Ready-Mix Concrete (RMX) and nurtured Modern Building Materials (MBM) while serving a customer base that's unique to our industry.

A SINGLE BRAND, A UNIQUE LOGO

NU Vista's Red signifies Energy and Passion, while the dual shades of Green signify Nuvoco's collaborative approach, focusing on Innovation and sustainability.

The Ellipse “○”

Represents the green earth we are shaping with our innovation, to make it smarter, more sustainable and safer for everyone.

The Pyramid “▲”

Portrays the progressive values of the company, signifying GROWTH, INNOVATION and the FUTURE-DRIVEN VISION. Red colour symbolises Energy and Passion towards achieving its vision.



The Baseline
"SHAPING A NEW WORLD"
a new vision, a new territory,
a new baseline

The “√”

The right symbol stands for the promise of the brand and symbolises the collaborative power of the organization. The dual tone of Green emphasises on the symbiotic relationship of the collaboration and company's drive for sustainability.

The Font

A confident Typeface that stands for brand's personality portraying the dynamic ethos of the company and TRUST for the brand.

OUR JOURNEY TILL NOW

2014



Nirma Group entered the Cement business through a greenfield cement plant in Nimbol, Rajasthan.

2016



Nirma group acquired Lafarge India Limited, which entered India in 1999.

2017



Rechristened from Lafarge India Limited to Nuvoco Vistas Corp. Ltd.

2019



Commissioned the first Captive Power Plant (CPP) and Waste Heat Recovery (WHR) in Chittorgarh Cement Plant.

2020



Merger of Nimbol Cement undertaking of Nirma Limited with Nuvoco Vistas Corp. Ltd.

Acquired NU Vista Limited (formerly Emami Cement Limited)

2021



Launched IPO (Initial Public Offering) and listed equity shares on BSE and NSE, successfully.

FEW PRESTIGIOUS CLIENTS & LANDMARK PROJECTS



 **Sharda University**
Delhi



 **Nazrul Tirtha**
Kolkata



 **Amritsar Entry Gate**
Punjab



 **Suven Life Sciences**
Hyderabad



 **Khodaldham Temple**
Ahmedabad



 **World One Towers**
Mumbai



 **Sumadhura Shikharam**
Bengaluru



 **Futorex Marathon Reality**
Mumbai



 **Twilight Star**
Surat



 **Pradhan Mantri Awas Yojana**
Raipur



 **Ceebros**
Chennai



 **Dolphin Jewels Project**
Raipur

OUR BUSINESSES & FACILITIES

CEMENT

An epitome of strength and durability, our cement is best known for their BIS standard ratings and use of highest-quality raw material. Our cement product portfolio include Concreto, Duraguard, DoubleBull, PSC, Nirmax and Infracem.

READY-MIX CONCRETE (RMX)

With more than 55+ plants across India, we are one of the leading industry players in the Ready-mix Concrete (RMX) industry. As a preferred partner, we provide value -added products like Artiste & InstaMix range which support high-end construction requirements.

MODERN BUILDING MATERIALS

We take pride in offering a comprehensive range of products under our **Modern Building Materials** vertical which is a key differentiator for Nuvoco. With a focus on innovation and quality, our extensive product portfolio includes Construction Chemicals, Multipurpose Bonding and Waterproofing Agents, Wall Putty, Tile & Stone Adhesives, Tile Grouts, Ready-Mix Dry Plaster, Block Joining Mortar, Dry Bag Concrete and Cover Blocks under **ZERO M** brand.

CONSTRUCTION DEVELOPMENT AND INNOVATION CENTER (CDIC)

Construction Development and Innovation Center (CDIC), which is a state-of-the-art R&D facility spread across 17,000 sq.ft, received accreditation (registration number TC 7607) from the National Accreditation Board for Testing and Calibration Laboratories (NABL) in 2019. With this they can conduct more than 100 mechanical tests, out of which, 55 tests come under the NABL accreditation; covering a range of materials including cement, fly ash, GGBS (Ground Granulated Blast-furnace Slag), concrete, aggregates, bricks, blocks, and construction chemicals.





**TECH
EXPRESS**



**NUVO
NIRMAAN**

Captain Nuvoco stands as the beacon of excellence in our commitment to delivering unparalleled value to our customers. As the guiding force behind **Tech Express** and a qualified civil engineer, Captain Nuvoco brings a wealth of knowledge and experience to the forefront, ensuring meticulously orchestrated process of precision and quality in each task. Beyond technical proficiency, Captain Nuvoco is more than just a service provider; he is a trusted advisor, offering invaluable insights and best practices for construction to empower our customers in achieving their project goals.



WATERPROOFING SOLUTIONS

Unwavering Protection: Protect Your Structures With Our WATERPROOFING SOLUTIONS





NUVOCO ZERO M IWC+

Integral Waterproofing Compound for
Plaster & Concrete

Nuvoco ZERO M IWC+ is a specially designed liquid integral waterproofing compound based on modified polymers, enhancers & plasticizers. It is supplied in a reddish-brown solution which is instantly dispersible in water. Nuvoco Zero M IWC+ is used in cement concrete, mortar & plasters which makes concrete cohesive & prevents segregation. It is compatible with all types of cement.



FEATURES & BENEFITS



**CORROSION
RESISTANT**



**PREVENTS
CRACKS**



**INCREASES
WORKABILITY**

STANDARD COMPLIANCE: Complies to IS: 2645-2003 | IS: 9103-1999

AREAS OF APPLICATION:

Nuvoco Zero M IWC+ is recommended for:

- Structural concrete, mortar, columns & beam
- Repair & rehabilitation
- Water-retaining structures, basements, water tanks
- Flat, slope roof slabs & screeds
- Internal/external plaster
- Bathrooms, balconies & in drains.

SAFETY INSTRUCTIONS:

- Do not add ZERO M IWC+ directly to dry cement & aggregate mix.
- Maintain water-cement ratio as low as possible.
- Do not increase the dosage of ZERO M IWC+ than the recommendation.
- Wear protective safety clothes, hand gloves, safety goggles and nose mask during application.
- In case of contact with skin & eyes wash with plenty of water & seek medical attention.
- Keep out of reach of children.

PACKAGING: 1L, 5L 10L, 20L, 200L

STORAGE AND SHELF LIFE:

The shelf life in original factory sealed packing is 24 months from date of manufacturing when stored under cover & out of direct sunlight. Protect from extremes of temperature.



NUVOCO ZERO M ROOFSHIELD

Advanced Acrylate with PU Waterproof Coating for Roofs & Parapet walls

Nuvoco Zero M Roof Shield is a single component monolithic waterproof coating for roofs and parapet walls that offers protection against water ingress. Zero M Roof Shield is based on Acrylate PU hybrid emulsion technology reinforced with nano fibre. The flexible waterproof membrane provides superior crack bridging and long-lasting protection for roof surfaces. Nuvoco Zero M Roof Shield provides dual benefits of waterproofing as well as surface temperature reduction.

FEATURES & BENEFITS



**CRACK
BRIDGING**



**UP TO 10°C SURFACE
TEMPERATURE REDUCTION**



**SELF
PRIMING**

STANDARD COMPLIANCE / SPECIFICATION:

Nuvoco Zero M meets the ASTM D6083 M - Type II standard specification

FEATURES & BENEFITS:

- Waterproofing - Excellent water resistance
 - Highly Flexible - Crack bridging ability up to 2mm & 300% elongation
 - Reflective roof coating - Reduces surface temperature up to 10 °C* in peak summer
 - Self-priming - so no other external primer required. Hence economical
 - Eco friendly - Nontoxic & water based coating
 - Excellent Durability - Exhibits good resistance to aging & weathering
- * Tested under standard conditions

AREAS OF APPLICATION:

- Over brick-bat coba, concrete screeds.
- Roof / Terraces , Flat & Slope
- Parapet Walls.

PACKAGING: 20L (coming soon - 4L, 10L)

STORAGE AND SHELF LIFE:

The shelf life in original factory sealed packing is 36 months from date of manufacturing when stored under cover & out of direct sunlight. Protect from extremes of temperature.



NUVOCO ZERO M MULTIPURPOSE ACRYLIC EXPERT

Advance Acrylic Emulsion For Bonding, Repair & Waterproofing

NUVOCO ZERO M MULTIPURPOSE ACRYLIC EXPERT is an UV resistant acrylic compound that is the best suited for external applications including waterproof slurry coating on the concrete surface to help extend its longevity

FEATURES & BENEFITS



PROVIDES
**EXCELLENT
BOND**



MAXIMUM
DURABILITY



IMPROVES
**WATERPROOFING
PROPERTIES**

STANDARD COMPLIANCE: Confirms to ASTM C 1042-1999

AREAS OF APPLICATION:

- As Bonding agent in repair & rehabilitation works
- As slurry coat for waterproofing of Roof slab, terraces, parapet walls, terraces, balconies, water tanks, swimming pools, basements, retaining walls, tunnels, bathroom or any floor exposed to dampness
- As a Polymer Modified Mortar for waterproof plasters

SAFETY INSTRUCTIONS:

- It is a non-inflammable compound
- Wear protective safety clothes, hand gloves, safety goggles and nose mask during application
- In case of contact with skin & eyes wash with plenty of water & seek medical attention
- Keep out of reach of children.

PACKAGING: 1L, 5L 10L, 20L

STORAGE AND SHELF LIFE:

The shelf life in original factory sealed packing is 24 months from date of manufacturing when stored under cover & out of direct sunlight. Protect from extremes of temperature.



NUVOCO ZERO M MULTIPURPOSE LATEX EXPERT

SBR Polymer Based Multipurpose Bonding, Repair And Waterproofing Compound

NUVOCO ZERO M MULTIPURPOSE LATEX EXPERT is a multipurpose repair and waterproofing compound that makes the mortar/concrete more cohesive and increase bond strength.

FEATURES & BENEFITS



PROVIDES
DURABILITY



ENHANCES
STRENGTH



PREVENTS LEAKAGE
& **DAMPNESS**

AREAS OF APPLICATION:

- As Bonding agent in structural repairs & rehabilitation works (bonding old concrete to new)
- As slurry coat for waterproofing of kitchen, water tanks, swimming pools, basements, retaining walls, tunnels, bathroom or any sunken area
- As a Polymer Modified Mortar for waterproof plasters

SAFETY INSTRUCTIONS:

- Wear protective safety clothes, hand gloves, safety goggles and nose mask during application
- In case of contact with skin & eyes wash with plenty of water & seek medical attention.
- Keep out of reach of children.

PACKAGING: 1L , 5L, 10L, 20L

STORAGE AND SHELF LIFE:

The shelf life in original factory sealed packing is 24 months from date of manufacturing when stored under cover & out of direct sunlight. Protect from extremes of temperature.



NUVOCO ZERO M 2K

Cementitious two component waterproof coating

NUVOCO ZERO M 2K is a two-component acrylic cementitious coating formulated to be mixed on-site and applied over the concrete & masonry surfaces by brush, to provide an elastomeric waterproof membrane. The coating provides a hard, seamless surface and a barrier to protect from water ingress and moisture.

FEATURES & BENEFITS



HIGHER
ELONGATION



HIGHER
DRY FILM
THICKNESS



FIBER
ENRICHED

STANDARD COMPLIANCE: Certified from CFTRI to confirm US-FDA regulations for safe drinking water

AREAS OF APPLICATION:

- Roof slab, terraces, balconies • Bathrooms, kitchen sinks, chajjas • Domestic water tanks (CFTRI Approved)

COVERAGE:

0.6 - 0.75 m²/kg @1 mm thickness in 2 coats

SAFETY INSTRUCTIONS:

- Wear protective safety clothes, hand gloves, safety goggles and nose mask during application
- In case of contact with skin & eyes wash with plenty of water & seek medical attention.
- Keep out of reach of children.

PACKAGING: 15kg (5 kg liquid + 10kg powder)

STORAGE AND SHELF LIFE:

The shelf life in original factory sealed packing is 12 months from date of manufacturing when stored under cover & out of direct sunlight. Protect from extremes of temperature.



TILE & STONE FIXING SOLUTIONS

Your One-Stop Shop:
For Premium
TILE & STONE
FIXING SOLUTIONS





NUVOCO ZERO M TILE ADHESIVE T1

Non-shrink cement based Tile Adhesive

NUVOCO ZERO M TILE ADHESIVE T1 is a non-shrink, polymer modified and grey cement-based thin set tile adhesive for fixing high porosity tiles like ceramic/clay, terracotta and quarry tiles of regular size on cementitious surfaces like plaster or concrete.

FEATURES & BENEFITS



NON-SHRINK



**POLYMER
MODIFIED**



**BETTER
WORKABILITY**

STANDARD COMPLIANCE: Confirms to IS 15477: 2019 (TYPE 1 T) & EN 12004: 2017 (C1T)

AREAS OF APPLICATION, TYPE OF SUBSTRATE & TYPE OF TILE:

- Interior floor & Wall application for dry areas only.
- Cement-based substrates like cement plaster, cement concrete, cement screed.
- Clay & ceramic (non-vitrified), terracotta and quarry tiles.

COVERAGE*:

- 57 - 60 Sq Ft / 20Kg (at 3mm thickness)

*Coverage will vary depending on trowel notch size, type, size of tile and substrate smoothness and evenness. Notch Trowel 6x6x6mm used during coverage calculation Coverage Calculated at 27°C in Standard laboratory condition.


RECOMMENDATION: For Tile size not more than 300 X 300 mm (< 1 Ft x 1 Ft)

PACKAGING: 20 Kg bag

STORAGE AND SHELF LIFE:

The shelf life in original factory sealed packing is 12 months from date of manufacturing when stored under cover & out of direct sunlight. Protect from extremes of temperature.

*All Tile Size mentioned are as per IS. This may vary from site to site during actual application

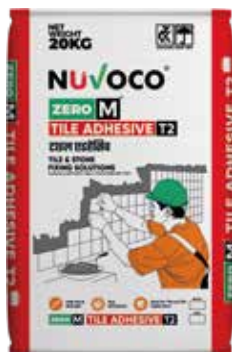

NUVOCO ZERO M TILE ADHESIVE T2

Recommended for Tile-on-Tile Application

NUVOCO ZERO M TILE ADHESIVE T2 is a polymer-modified thin-set cement-based tile adhesive for fixing all types of Vitrified/fully vitrified tiles, glass mosaic tiles, stone tiles & slabs of regular size. It is suitable for both vertical and horizontal surfaces, over the cementitious substrate for indoor application, in dry & wet areas. It is also recommended to Tile-on-Tile application.

FEATURES & BENEFITS



**HIGH BOND
STRENGTH**



**SAG
RESISTANCE**



**IDEAL FOR TILE-ON-TILE
APPLICATION**

STANDARD COMPLIANCE: Confirms to IS 15477: 2019 (TYPE 2 T) & EN 12004: 2017 (C2T)

AREAS OF APPLICATION, TYPE OF SUBSTRATE & TYPE OF TILE:

• Interior & exterior floor & wall applications for wet areas, kitchen, toilets, submerged areas like – swimming pools & fountains. • Cement-based substrates like cement plaster, cement concrete, cement screed. • Suitable for Vitrified/fully vitrified tiles, Glass mosaic tiles, Stones tiles & slabs (All types).

COVERAGE*:

• 57 - 60 Sq Ft / 20Kg (at 3mm thickness)

*Coverage will vary depending on trowel notch size, type, size of tile and substrate smoothness and evenness. Notch Trowel 6x6x6mm used during coverage calculation Coverage Calculated at 27oC in Standard laboratory condition.

RECOMMEDATION: For Tile size more than 300X 300 mm and less than 600X600 mm. (< 2Ft X 2Ft)

PACKAGING: 20 Kg bag

STORAGE AND SHELF LIFE:

The shelf life in original factory sealed packing is 12 months from date of manufacturing when stored under cover & out of direct sunlight. Protect from extremes of temperature. sunlight. Protect from extremes of temperature.

*All Tile Size mentioned are as per IS. This may vary from site to site during actual application



NUVOCO ZERO M TILE ADHESIVE T3

Recommended For Natural Stones, Granite, Marble & Glass Tiles

NUVOCO ZERO M TILE ADHESIVE T3 is a polymer modified tile adhesive, suitable mainly for natural stones, granite marble and glass tiles of regular and large size. It is suitable for both vertical and horizontal surfaces, over the cementitious substrate for indoor and outdoor application.

FEATURES & BENEFITS



**SUPERIOR BOND
STRENGTH**



**SAG
RESISTANCE**



**GOOD
FLEXIBILITY**

STANDARD COMPLIANCE: Confirms to IS 15477 : 2019 (TYPE 3 T) & EN 12004 : 2017 (C2TE)

AREAS OF APPLICATION, TYPE OF SUBSTRATE & TYPE OF TILE:

• External wall & porch Floor and wall application - Kitchen counter top. • Suitable for Plaster or Concrete substrates. • All types of Ceramic, clay, basalt tiles, Vitrified wall tiles, Fully Vitrified, Stone Tiles, Glass Mosaic, Porcelain Tiles and all natural stone tiles.

COVERAGE*:

• 58 - 60 Sq Ft / 20Kg (at 3mm thickness)

*Coverage will vary depending on trowel notch size, type, size of tile and substrate smoothness and evenness.

Notch Trowel 6x6x6mm used during coverage calculation Coverage Calculated at 27oC in Standard laboratory condition.

RECOMMENDATION: For Tile size < 1200 X 1200 mm (< 4 Ft X 4 Ft)

PACKAGING: 20 Kg bag

STORAGE AND SHELF LIFE:

The shelf life in original factory sealed packing is 12 months from date of manufacturing when stored under cover & out of direct sunlight. Protect from extremes of temperature.

*All Tile Size mentioned are as per IS. This may vary from site to site during actual application



NUVOCO ZERO M TILE ADHESIVE T4

Recommended For Installation on Dry Wallboard Substrates

NUVOCO ZERO M TILE ADHESIVE T4 is intended for installation on dry wallboard substrates. This tile adhesive is suitable for all types of stones and tiles except metal or engineered stone tiles.

FEATURES & BENEFITS



**EXCELLENT
BOND STRENGTH**



**SUPERIOR GRAB &
NON-SAG**



**HIGHLY
FLEXIBLE**

STANDARD COMPLIANCE: Confirms to IS 15477: 2019 (TYPE 4 T) & EN 12004: 2017 (C2TES1)

AREAS OF APPLICATION, TYPE OF SUBSTRATE & TYPE OF TILE:

- Interior floor & Wall application for dry areas only.
- Gypsum boards, plywood, wood, calcium silicate boards, medium density fiber boards, fiber cement boards, cement boards, bison panel etc.
- All types of tiles and stones except metal tiles or engineered stone to be installed on dry wall board substrates.

COVERAGE*:

• 58 - 60 Sq Ft / 20Kg (at 3mm thickness)

*Coverage will vary depending on trowel notch size, type, size of tile and substrate smoothness and evenness.

Notch Trowel 6x6x6mm used during coverage calculation Coverage Calculated at 27°C in Standard laboratory condition.

RECOMMEDATION: For Tile size < 1200 X 1200 mm (< 4 Ft X 4 Ft)

PACKAGING: 20 Kg bag

STORAGE AND SHELF LIFE:

The shelf life in original factory sealed packing is 12 months from date of manufacturing when stored under cover & out of direct sunlight. Protect from extremes of temperature.

*All Tile Size mentioned are as per IS. This may vary from site to site during actual application



NUVOCO ZERO M TILE ADHESIVE T5

Superior Epoxy based PU Adhesive for Tile & Stone

NUVOCO ZERO M TILE ADHESIVE T5 is a two-component epoxy-based PU multipurpose adhesive for fixing all types of tiles and stones on a variety of substrates in interior and exterior areas on walls & floor. It is specially designed for fixing tiles/stones on water-sensitive/deformable or absorbent/ non-absorbent substrates. Having flexible properties, is resistant to freeze and thermal shocks when fully cured.

FEATURES & BENEFITS



**SUPER
BOND STRENGTH**



**EXCELLENT
MULTI-SURFACE
ADHESION**



**IMPACT & VIBRATION
RESISTANCE**

STANDARD COMPLIANCE: Confirms to IS 15477: 2019 (TYPE 5 T S2) & EN 12004: 2017 (R2T)

AREAS OF APPLICATION, TYPE OF SUBSTRATE & TYPE OF TILE:

• For interior & exterior floor and wall application. • Plywood, gypsum board, cement sheet, bison panels, PVC, metal, composites, ceramics, glass etc. • Ceramic vitrified, fully vitrified, natural stone tiles, glass mosaic, porcelain tiles.

COVERAGE*:

- 16 - 20 sq. ft/ 4 kg pack - 1.5 mm bed thickness (using 3 mm x 3 mm notch trowel).
- 8 - 10 sq. ft/ 4 kg pack - 3 mm bed thickness (using 6 mm x 6 mm notch trowel).

*Coverage will vary depending on trowel notch size, type, size of tile and substrate smoothness and evenness. Notch Trowel 6x6x6mm used during coverage calculation Coverage Calculated at 27 °C in Standard laboratory condition..

RECOMMENDATION: For Tile size > 1200 X 1200 mm. (> 4 Ft X 4 Ft)

PACKAGING: 4 Kg bucket (Contains Resin - 3.65Kg & Hardener 0.35Kg)

STORAGE AND SHELF LIFE:

The shelf life in original factory sealed packing is 24 months from date of manufacturing when stored under cover & out of direct sunlight. Protect from extremes of temperature.

*All Tile Size mentioned are as per IS. This may vary from site to site during actual application



NUVOCO ZERO M EPOXY TILE GROUT

A solvent free two-part epoxy grout for horizontal & vertical applications

NUVOCO ZERO M EPOXY TILE GROUT has high compressive, flexural and shear adhesion strength. It is resistant to acids, alkalis, corrosive agents, cleaning agents, sea, and salt water. It is uniform in colour thereby adding durability and enhancing the beauty of your floor tiles.

FEATURES & BENEFITS



**STAIN
RESISTANT**



**BACTERIA &
FUNGAL
RESISTANT**



**NON
SHRINK**

STANDARD COMPLIANCE: Confirms to RG as per EN 13888:2009

AREAS OF APPLICATION, TYPE OF SUBSTRATE & TYPE OF TILE:

- Wet areas like - Kitchen, Bathroom, swimming pools etc.
- Interior floor & floor application for dry areas - Living room, bedroom, terraces, balconies etc.
- Industrial applications - plants, laboratories, dairies.
- All types of tiles and natural stone tiles.
- Recommended for ceramic, vitrified tiles and non-vitrified tiles and stone tiles.

COVERAGE: Dependent on the size of tiles and width of joints (kg/m²)

FORMULA FOR THE COVERAGE CALCULATION: $C = 1.75 \times H \times T \times [(L + W) / (L \times W)]$


- C - Tile grout coverage (kg/m²) • H - Thickness of tile (mm) • T - Width of joint (mm)
- L - Length of tile (mm) • W - Width of tile (mm)

PACKAGING: Net Quantity 5 kg (4.5 kg Resin + 0.5 kg Hardener)

AVAILABLE: In 21 colours

STORAGE AND SHELF LIFE:

The shelf life in original factory sealed packing is 24 months from date of manufacturing when stored under cover & out of direct sunlight. Protect from extremes of temperature.

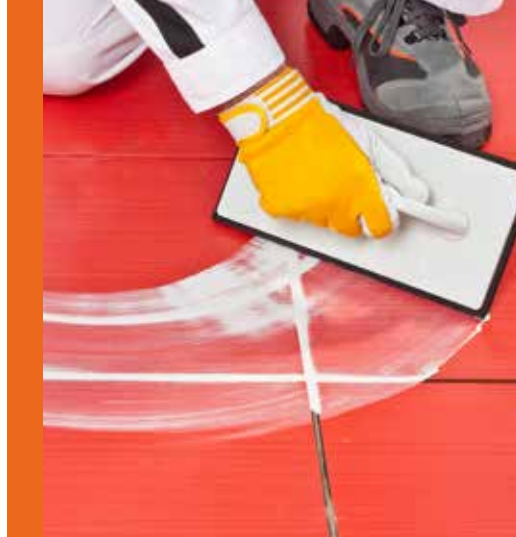

NUVOCO ZERO M TILE GROUT

High-quality joint filler for tile joints.

It is an un-sanded grout consisting of cement, polymers, fillers and special additives which requires only the addition of water on site. It can be simply applied with rubber float grout. High-quality joint fillers ensure strong long lasting tile joints for floors and walls.

FEATURES & BENEFITS



**FAST
SETTING**



**WATERPROOFING
JOINT FILLER**



**NON
SHRINK**

STANDARD COMPLIANCE: Confirms to CG -2WA as per EN 13888:2009

AREAS OF APPLICATION:

• Suitable for internal and external usage for floor and walls. • All types of tiles and natural stone tiles. • Recommended for ceramic, vitrified tiles and non-vitrified tiles and stone tiles.

COVERAGE:

Dependent on the size of tiles and width of joints (kg/m²)

FORMULA FOR THE COVERAGE CALCULATION:

$C = 1.75 \times H \times T \times [(L + W) / (L \times W)]$

- C - Tile grout coverage (kg/m²) • H - Thickness of tile (mm) • T - Width of joint (mm)
- L - Length of tile (mm) • W - Width of tile (mm)

PACKAGING: Net Quantity 1 kg

AVAILABLE: In 7 colours

STORAGE AND SHELF LIFE:

The shelf life in original factory sealed packing is 12 months from date of manufacturing when stored under cover & out of direct sunlight. Protect from extremes of temperature.



NUVOCO ZERO M TILE GLITTER

Glitter for epoxy-based tile grout

Nuvoco Zero M Tile Glitter is designed to give a sparkling effect and enhance the beauty of tiles. This, when mixed with epoxy grout, creates shimmering joints that add a touch of luxury to your space.

FEATURES & BENEFITS



AVAILABLE IN
THREE SHADES



EXCELLENT
CHEMICAL
RESISTANCE



EASY
TO USE

TYPE OF TILES: All types of ceramic tile, glazed tiles, porcelain tiles, vitrified & fully vitrified tiles, natural stones, large format tiles, glass mosaic tiles, composites & engineered stone

AREAS OF APPLICATION: To get sparkling shining joints with enhanced beauty in floor & walls of internal & external area, dry as well as wet area, domestic applications, commercial applications, wider tile joints.

DOSAGE:

- The ideal dosage of glitter should be 50 gm per 1 kg pack.
- The dosage of glitter can be adjusted to 4 - 6% of Zero M Epoxy Tile Grout as per customer's requirement for aesthetic look.
- Refer coverage chart mentioned in Zero M Epoxy Tile Grout TDS for consumption.

*(Coverage may vary depending on texture & porosity of the substrate)

PACKAGING: 100 grams Bottle

AVAILABLE: In three Shades (Gold, Silver & Copper)

STORAGE AND SHELF LIFE: The shelf life in the original sealed packing is 36 months from date of production when product is stored under cover & out of direct sunlight. Protect from extremes of temperatures (store between 10 °C to 35 °C temperature).



NUVOCO ZERO M TILE BONDER

Improves adhesion & workability, economical to use

NUVOCO ZERO M Tile Bonder is a polymer based additive that is mixed with cement/ cement & sand for tile fixing. It is recommended for floor application to fix different types of tiles and stones.

FEATURES & BENEFITS



**SUPERIOR
ADHESION**



**IMPROVES
WORKABILITY**



ECONOMICAL

AREA OF APPLICATION, TYPE & RECOMMENDED SIZE OF TILES:

NUVOCO ZERO M Tile BONDER is recommended for -

- For dry area internal flooring. Also used for fixing tiles on screed and machaan (recommended for Horizontal Application)
- Ceramic tiles up to < 300 X 300 mm (< 1 Ft x 1 Ft)

DOSAGE:

300gm pouch to be mixed with 1 bag of 50 kg cement along with 15-20 Litre water. (Water can be adjusted to the desired consistency based on application).

PACKAGING:

300gm pouch

STORAGE AND SHELF LIFE:

The shelf life in the original sealed packing is 12 months from date of production when product is stored under cover & out of direct sunlight. Protect from extremes of temperatures (store between 10 °C to 35 °C temperature).



SURFACE PREPARATION SOLUTIONS

Transforming surfaces:
Explore our range
of high-quality
**SURFACE PREPARATION
SOLUTIONS**





NUVOCO ZERO M WALL PUTTY

High Performance Polymer Putty

NUVOCO ZERO M WALL PUTTY comes with the High-Performance Polymer which provides smooth finish on walls, protects walls from water damage, peels, cracks and dampness - on both interior and exterior surfaces providing durability to the surface. Its water repelling characteristic prevents dampness and the resulting discolored patches year after year.

FEATURES & BENEFITS



**SUPERIOR
ADHESION**



**SUPERIOR
FINISH**



**SUPERIOR
COVERAGE**

COVERAGE:

**10 - 15 Sq Ft / Kg - 2 coats

AREAS OF APPLICATION:

• Old painted/unpainted surface • Areas affected with efflorescence action • New surfaces

PACKAGING: 1Kg, 20Kg, 40Kg, 50Kg (project packs)

STORAGE AND SHELF LIFE:

The shelf life in original factory sealed packing is 12 months from date of manufacturing when stored under cover & out of direct sunlight. Protect from extremes of temperature.

** Above coverage calculated at Std Laboratory conditions. ** Coverage will vary depending on actual site conditions.



NUVOCO ZERO M DRY PLASTER

High Performance Dry Plaster with PAF Technology

NUVOCO ZERO M DRY PLASTER is a superior ready-mix cement plaster produced in a controlled environment to provide a durable, smooth and crack-and-water-resistant surface to the structure.

FEATURES & BENEFITS



**CRACK
RESISTANT**



**WATER
RESISTANT**



**MINIMUM
WASTAGE**

COVERAGE:

**15 - 25 Sq Ft for 10 - 12 mm thickness

AREAS OF APPLICATION:

- Exterior & interior surface
- Ceiling Application

PACKAGING: 40Kg

STORAGE AND SHELF LIFE:

The shelf life in original factory sealed packing is 6 months from date of manufacturing when stored under cover & out of direct sunlight. Protect from extremes of temperature.

** Above coverage calculated at Std Laboratory conditions ** Coverage will vary depending on actual site conditions



NUVOCO ZERO M BLOCK JOINTING MORTAR

Premix High-Quality Mortar

NUVOCO ZERO M BLOCK JOINTING MORTAR is a premix high-quality mortar for joining and bonding of all types of substrate like AAC Blocks, Concrete Blocks, Hollow Blocks and Bricks.

FEATURES & BENEFITS



**NO WATER
CURING**



**EXCELLENT
BOND STRENGTH**



**OPTIMUM
WATER-MORTAR
RATIO**

COVERAGE:

**155 - 170 Sq Ft/40 Kg bag for 4X8X16" wall

AREAS OF APPLICATION:

- AAC blocks
- Concrete blocks (solid & hollow)
- Bricks
- Suitable substrate

PACKAGING: 40Kg

STORAGE AND SHELF LIFE:

The shelf life in original factory sealed packing is 6 months from date of manufacturing when stored under cover & out of direct sunlight. Protect from extremes of temperature.

** Above coverage calculated at Std Laboratory conditions ** Coverage will vary depending on actual site conditions



REPAIR SOLUTIONS

Revive Your Surfaces: Discover Our Advanced **REPAIR SOLUTIONS**





NUVOCO ZERO M TILE CLEANER

A Versatile & multipurpose cleaning solution for all types of ceramic surfaces

Nuvoco Zero M Tile Cleaner is versatile & multipurpose cleaning solution for all types of acid resistant surfaces. It is a rapid active cleaner and degreasing solution for use on tiles, bathtubs, wash basin, privy basin and concrete etc to remove cement, grout residues, lime scales & stains. It is supplied as a bluish solution which is instantly dispersible in water. Nuvoco Zero M Tile Cleaner provides a stain free, shining surface after cleaning.

FEATURES & BENEFITS



**EFFECTIVE
STAIN REMOVAL**



**EASY
RINSE-OFF**



**NO ADVERSE
EFFECT ON SURFACES**

STANDARD COMPLIANCE/ SPECIFICATION:

Nuvoco Zero M Tile Cleaner complies to Class 2 requirements as per "IS 13630-8 (2006)" Ceramic Tiles - Methods of test, Sampling and Basis of Acceptance, Part 8: Determination of chemical resistance - Glazed tiles.

AREAS OF APPLICATION:

- Cleans stain on ceramic tiles, glazed tiles, porcelain tiles, vitrified tiles, glass mosaic tiles & sanitary ware.
- Areas of application - Domestic & commercial tiling area (both Internal & external) such as floor and wall tiling in kitchen, bathrooms, toilets, garages, factories, general building sites

COVERAGE:

Depends upon porosity & severity of contamination of substrate. Usually, 1 Litre of Acid Cleaner cleans about 5 - 20 m² of floor.

PACKAGING: Net Quantity 1L

STORAGE AND SHELF LIFE:

The shelf life in original factory sealed packing is 12 months from date of manufacturing when stored under cover & out of direct sunlight. Protect from extremes of temperature.



ANCILLARY SOLUTIONS

Elevate your construction:
Enhanced structural
integrity with our
ANCILLARY SOLUTIONS





NUVOCO ZERO M COVER BLOCK

Premium Quality Cover Blocks

NUVOCO ZERO M COVER BLOCKS ensure even spacing between the framework and shuttering and hold the TMT framework firmly in place during concreting.

FEATURES & BENEFITS



FIBER
ENRICHED
BLOCKS



UNIFORM
SHAPE &
SIZE



BETTER
FRAMEWORK
SUPPORT

PACKAGING:

**155 - 170 Sq Ft/40 Kg bag for 4X8X16" wall

PACKAGING:

- Type 1 (100 units/packs) - Size 20-25.
- Type 2 (50 units/packs) - Size 30-35-40.
- Type 3 (100 units/packs) - Size 20-25-30.

AVAILABLE IN: Grey & Terracotta

STORAGE AND SHELF LIFE:

The shelf life in original sealed packing is 24 months from date of production when stored under cover & out of direct sunlight. Protect from extremes of temperatures.

NUVOCO®



FROM THE HOUSE OF ZERO M

ZERO M ROOF SHIELD

Advanced Acrylate with PU Waterproof Coating for Roofs & Terraces

ZERO M 2K

Cementitious two component waterproof coating for roof slabs, terrace, balconies, water tanks etc

ZERO M MULTIPURPOSE ACRYLIC EXPERT

Acrylic based bonding & repair agent for exposed surfaces

ZERO M DRY PLASTER

Interior & Exterior wall application

ZERO M IWC+

Integral waterproofing compound for cement, mortar & concrete

ZERO M TILE ADHESIVE T3

Kitchen countertop, external floor & wall

ZERO M TILE GROUT

High-quality joint filler for tile joints

ZERO M TILE BONDER

Internal Flooring application

ZERO M TILE GLITTER

Glitter for epoxy-based tile grout

ZERO M COVER BLOCKS

For slab, beam & columns

ZERO M BLOCK JOINTING MORTAR

Mortar for AAC and concrete blocks

ZERO M WALL PUTTY

High performance polymer putty

ZERO M TILE ADHESIVE T1

Interior floor & walls, dry areas

ZERO M TILE ADHESIVE T2

For kitchen, toilet, bathroom

ZERO M TILE ADHESIVE T4

For installation on Dry wallboard substrates

ZERO M MULTIPURPOSE LATEX EXPERT

SBR based bonding & repair agent for interior areas

ZERO M EPOXY TILE GROUT,

For wet areas, toilets, kitchen, pools, fountains etc

ZERO M TILE CLEANER

Cleaning solution for all types of ceramic surfaces

NUVOCO ZERO M TILE ADHESIVE T5

Superior Epoxy based PU Adhesive for multi-surface application

NUVOCO VISTAS CORP. LTD.

Choose from our range of **60+** products in: Cement | Modern Building Materials | Ready Mix Concrete

CONCRETO

DURAGUARD

DOUBLE BULL

ZERO M

Artiste

InstaMix

Ecodur

NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

CONDITIONS OF SALE

Subject to the Company's conditions of sale which are available on request. Company is not liable for consequential damage for unsatisfactory results, arising from the use non standard practices during storage/usage of products.

TECHNICAL SUPPORT

Nuvoco Vistas Corp Ltd. provides a technical advisory support through Construction Development & Innovation Centre (CDIC) for on site evaluation on admixture selection, evaluation trials, and required changes in concrete mixes to achieve desired fresh concrete & hardened concrete properties.

NOTE

The information supplied in this datasheet is based upon extensive experience and is given in good faith to help you. Our Company policy is one of continuous Research and Development; we therefore reserve the right to update this information at any time without prior notice. We also guarantee the consistent high quality of our products; however, as we have no control over site conditions or the execution of the work, we accept no liability for any loss or damage which may arise as a result thereof.



Disclaimer: The use of this product is beyond the manufacturer's control. The manufacturer is not responsible for any loss or damage arising from incorrect usage. The information contained herein is to the best of our knowledge true and accurate. No warranty is implied or given as to its completeness or accuracy in describing the performance or suitability of the product for a particular application.

For more information on placing orders, visit www.nuvoco.com | ☎ Toll free: 1800 345 6666 | 📞 Whatsapp 'NUVOCO' to 98300 17272

Choose from our range of **60+** products in: **Cement** | **Modern Building Materials** | **Ready Mix Concrete**

CONCREXO **DURAGUARD** **DOUBLE BULL** **ZERO M** *Artiste* **InstaMix** **Ecoduré**